



How to remove your S3U Computer

Tools Required

Metric Allen Set
#2 Phillips Screwdriver
Cutters
Vacuum Cleaner




- 1) Power off the bike and remove the power cord. With your metric Hex wrenches, remove the hardware holding the two shrouds together. There are three button head screws down the center.





- 2) With your #2 Phillips screwdriver you can begin to take the hardware that mounts the computer shrouds to the computer (4 on each side).

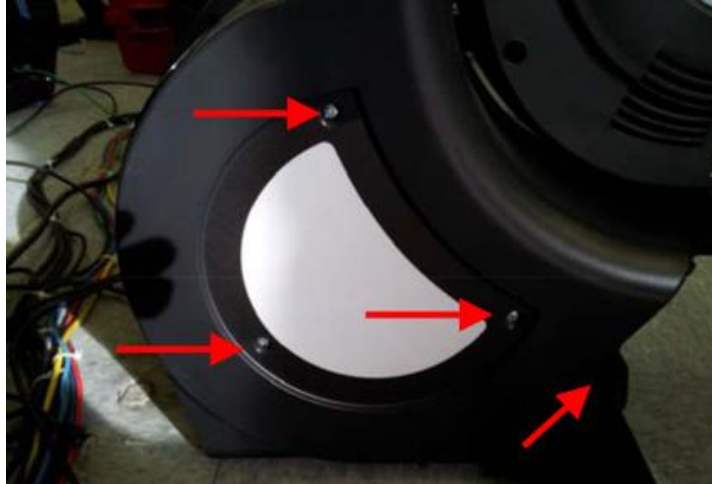


- 3) Remove the two center Phillips screws that secure the computer to the bike computer tray.





- 4) Disconnect the VGA, Two USB connectors and one headphone cable and on the other side the MRD cables and ground wire. We advise taking photos of the connections to make it easier to remember where to reconnect everything later.

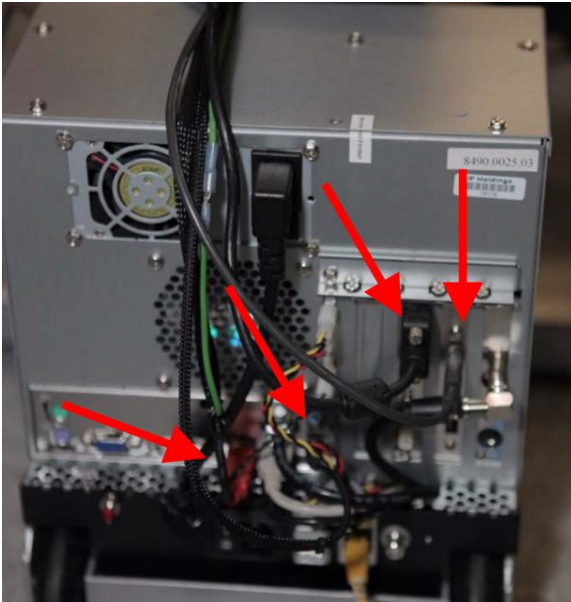

- 5) Your computer should now be free of the bike and can be packaged and sent in for repair. To reinstall the computer, simply reverse the above steps.